

Octopus Multi-system Framework

Micael Oliveira


Fortran OOP Seminar, January 14, 2022

Motivation

- After 20 years of development, the old code structure was starting to show its limits
- New developments were becoming more difficult
- Previous attempts to go beyond the “simple” electrons+nuclei implementation were not very successful
- Fortran 2003 introduces lots of new OOP features

In 2019 it was decided to introduce a new framework and rewrite large portions of Octopus using Fortran OOP.

What problem are we trying to solve?

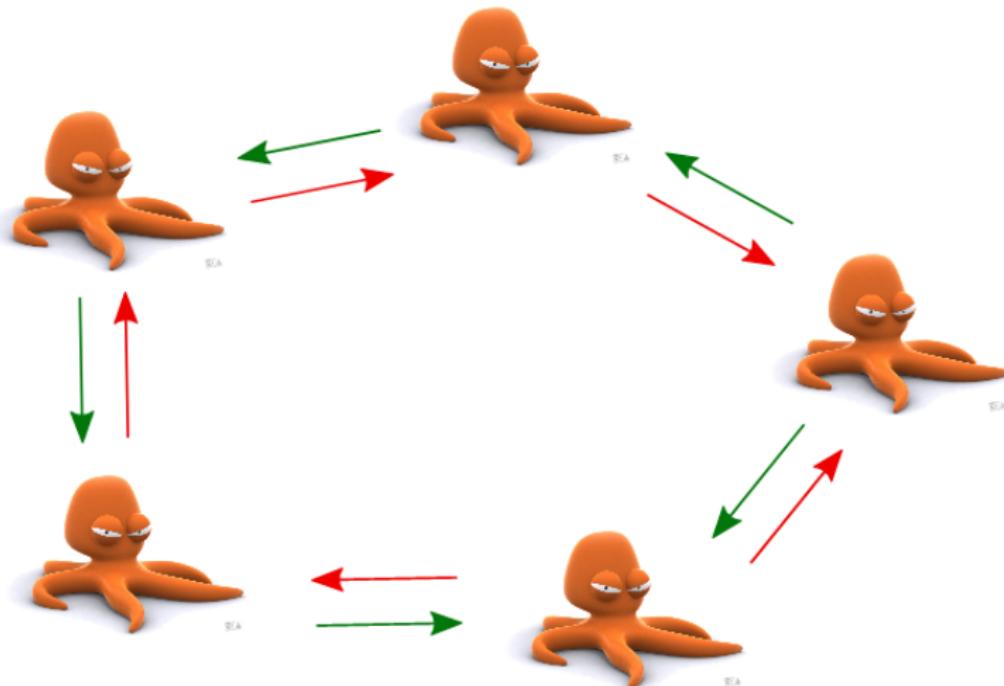

What problem are we trying to solve?

- We want to solve a system of **coupled** differential equations

Example: TDDFT coupled with classical nuclei

$$i \frac{\partial}{\partial t} \varphi_i(\mathbf{r}, t) = \left\{ v_{\text{ext}}(\mathbf{r}; \mathbf{R}) + v_{\text{H}}[n](\mathbf{r}, t) + v_{\text{xc}}[n](\mathbf{r}, t) \right\} \varphi_i(\mathbf{r}, t)$$

$$m_I \frac{\partial^2}{\partial t^2} \mathbf{R}_I(t) = \sum_J \mathbf{F}_{IJ}(\mathbf{R}_I, \mathbf{R}_J) + \mathbf{F}_{Ie}(\mathbf{R}_I; n)$$



What problem are we trying to solve?

- How to handle arbitrary numbers of equations?
- How to add/remove equations “on-the-fly” ?
- How to activate/deactivate couplings “on-the-fly” ?

How to code this?

The way **NOT** to do it:

```
if (system_A%is_electrons) then  
...  
else if (system_A%is_ions) then  
...  
end if  
  
if (system_A%has_interaction_X_with_system_B) then  
...  
end if  
  
if (system_B%has_interaction_X_with_system_A) then  
...  
end if  
  
if ((system_A%has_interaction_Y_with_system_B) then  
...  
end if
```


Multi-system framework: Key features

- Allows to define many physical systems simultaneously (electrons, ions, lasers, Maxwell, DFTB+, PCM, etc)
- Systems are coupled through interactions (Electron-ion, Lorentz force, dipole coupling, etc)
- The code automatically handles all the interactions/systems
- New parallelization level over systems
- Flexible algorithms:
 - Time-propagation using different propagators and time-steps for each system
 - Nested SCF loops
 - ...
- Adding new systems, interactions and algorithms should be as simple as possible

Multi-System Framework: Design

- Focus on extendability and maintainability
- Heavy use of object-oriented programming
- Framework is independent of existing systems and interactions
- Systems do not know about each other directly, instead they only know interactions
- Calculations modes are now “algorithms”, which are coded as a set of state machine atomic operations

Test environment: celestial dynamics

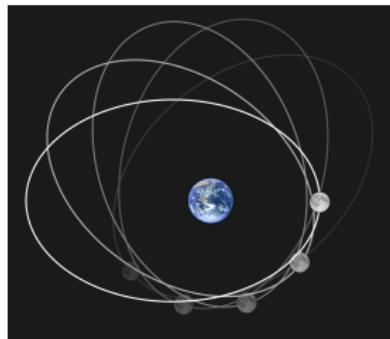

- System of Sun, Earth, and Moon as point particles interacting with gravity
- Numerical integration of orbits with different algorithms
- Fast turnover for code development

Test environment: celestial dynamics

inp

```
CalculationMode = td
ExperimentalFeatures = yes

%Systems
"Sun" | classical_particle
"Earth" | classical_particle
"Moon" | classical_particle
%
%Interactions
gravity | all_partners
%
InteractionTiming = timing_retarded

#Initial conditions are taken from https://ssd.jpl.nasa.gov/horizons.cgi#top.
# initial condition at time:
# 2458938.500000000 = A.D. 2020-Mar-30 00:00:00.0000 TDB

Earth.ParticleMass = 5.97237e24
%Earth.ParticleInitialPosition
-147364661998.16476 | -24608859261.610123 | 1665165.2801353487
%
%Earth.ParticleInitialVelocity
4431.136612956525 | -29497.611635546345 | 0.343475566161544
%
```

Test environment: celestial dynamics

inp (cont.)

```
Moon.ParticleMass = 7.342e22
%Moon.ParticleInitialPosition
-147236396732.81906 | -24234200672.857853 | -11062799.286082389
%
%Moon.ParticleInitialVelocity
3484.6397238565924 | -29221.007409082802 | 82.53526338876684
%

Sun.ParticleMass = 1.98855e30
%Sun.ParticleInitialPosition
0.0 | 0.0 | 0.0
%
%Sun.ParticleInitialVelocity
0.0 | 0.0 | 0.0
%

TDSystemPropagator = verlet

sampling = 24 # Time-steps per day
days = 3
seconds_per_day = 24*3600
Sun.TDTimestep = seconds_per_day/sampling
Earth.TDTimestep = seconds_per_day/sampling/2
Moon.TDTimestep = seconds_per_day/sampling/4
TDPropagationTime = days*seconds_per_day
```

New multi-system syntax

Systems block

```
%Systems
"Sun" | classical_particle
"Earth" | classical_particle
"Moon" | classical_particle
%
```

Nested systems

```
%Systems
"Sun" | classical_particle
"Earth" | multisystem
%
%Earth.Systems
"Terra" | classical_particle
"Luna" | classical_particle
%
```

New multi-system syntax

Namespaces

```
Sun.ParticleMass = 1.98855e30
Earth.Terra.ParticleMass = 5.97237e24
Luna.ParticleMass = 7.342e22
```

Interactions

```
%Interactions
  gravity      | all_partners
  coulomb_force | no_partners
%
%SystemA.Interactions
  gravity      | no_partners
  coulomb_force | all_partners
%
%SystemB.Interactions
  gravity      | only_partners | "SystemA"
  coulomb_force | all_except   | "SystemC"
%
```

Velocity Verlet

- ① Update positions

$$\mathbf{x}(t + \Delta t) = \mathbf{x}(t) + \mathbf{v}(t)\Delta t + \frac{1}{2}\mathbf{a}(t)\Delta t^2$$

- ② Update interactions with all partners (compute $\mathbf{F}(\mathbf{x}(t + \Delta t))$)
- ③ Compute acceleration $\mathbf{a}(t + \Delta t)$
- ④ Compute velocity


$$\mathbf{v}(t + \Delta t) = \mathbf{v}(t) + \frac{1}{2}(\mathbf{a}(t) + \mathbf{a}(t + \Delta t))\Delta t$$

Visualizing the multi-system time-stepping algorithm

https://octopus-code.org/new-site/develop/developers/code_documentation/propagators/custom_diagram/



Celestial orbits

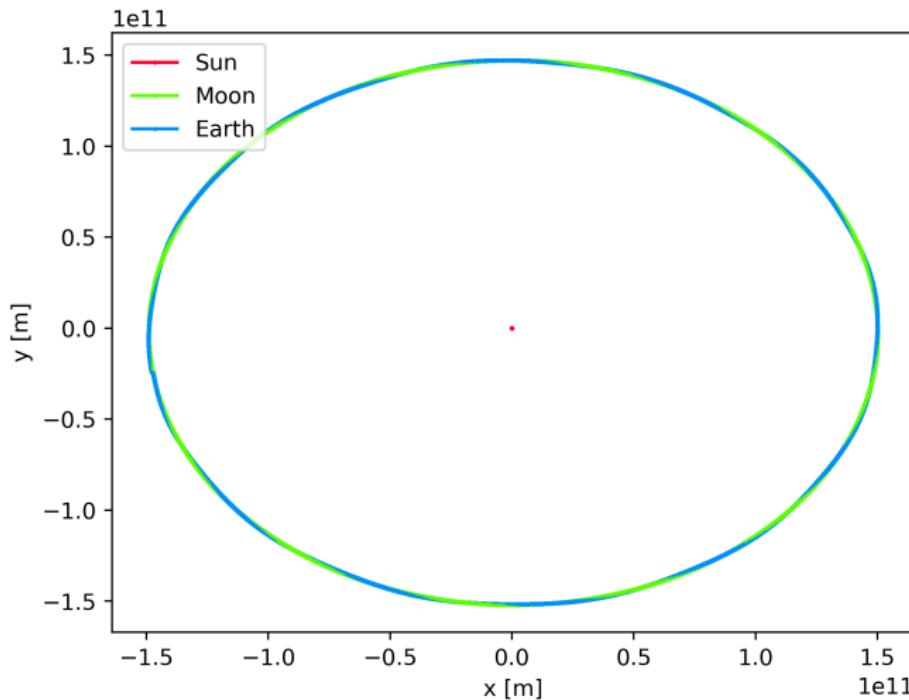


System classes

- Examples of systems:
 - Maxwell
 - Classical particles
 - Charged particles
 - Ions
 - Electrons
 - Tight binding model
 - etc.
- Re-use as much code as possible between different systems
- Use object oriented approach!
- Represent systems as classes and use inheritance

System classes

Currently implemented system classes:

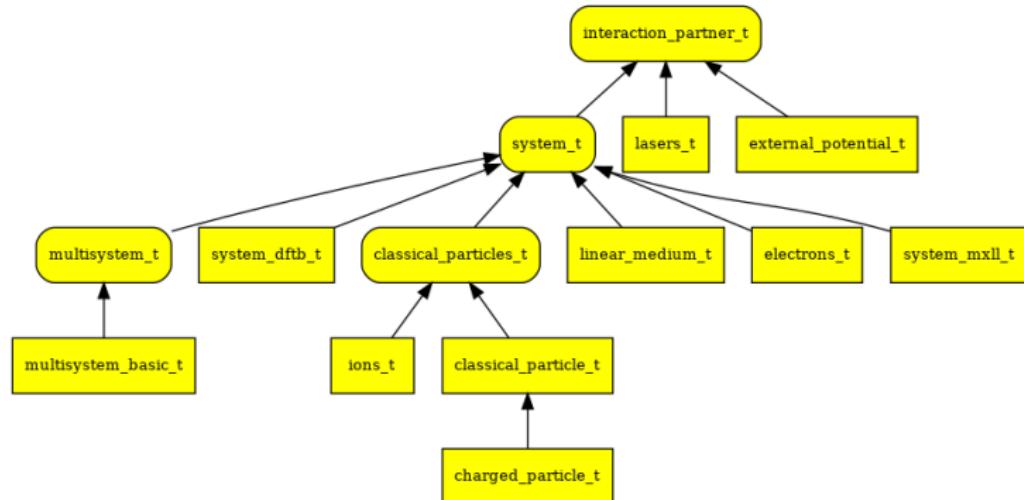

Rounded boxes: abstract class
Arrows indicate inheritance.

System classes

The abstract class interaction_partner_t:

```
type, abstract :: interaction_partner_t
private
  type(namespace_t), public :: namespace
  type(clock_t),     public :: clock
  type(space_t),    public :: space

  type(integer_list_t), public :: supported_interactions_as_partner

  type(quantity_t),   public :: quantities(MAX_QUANTITIES) !< Array of all possible quantities.
                                                !< The elements of the array are accessed using the
                                                !< quantity's identifiers.

contains
  procedure(interaction_partner_update_exposed_quantities),      deferred :: update_exposed_quantities
  procedure(interaction_partner_update_exposed_quantity),         deferred :: update_exposed_quantity
  procedure(interaction_partner_init_interaction_as_partner),    deferred :: init_interaction_as_partner
  procedure(interaction_partner_copy_quantities_to_interaction), deferred :: copy_quantities_to_interaction
end type interaction_partner_t
```

- Abstract class: cannot be instantiated
- Defines basic variables and interface for all classes which can be partner in an interaction
- Defines list of exposed quantities

System classes

The abstract class system_t:

```
type, extends(interaction_partner_t), abstract :: system_t
  private
    class(propagator_t), pointer, public :: prop => null()

  integer          :: accumulated_loop_ticks
  integer, public :: interaction_timing !< parameter to determine if interactions
  !< should use the quantities at the exact time or if retardation is allowed

  type(integer_list_t),    public :: supported_interactions
  type(interaction_list_t), public :: interactions !< List with all the interactions of this system

  type(MPI_Group), public :: grp !< MPI group for this system
  type(barrier_t) :: barrier(NUMBER_BARRIERS)
contains
  ...
end type system_t
```

- Abstract class: cannot be instantiated
- Inherits all from interaction_partner_t
- Defines basic variables and methods for all systems
- Implements methods which are common to all systems
- Defines deferred methods which are common to all systems, but depend on specifics

System classes

The system_t methods:

```
procedure :: dt_operation => system_dt_operation
procedure :: reset_clocks => system_reset_clocks
procedure :: update_exposed_quantities => system_update_exposed_quantities
procedure :: init_propagator => system_init_propagator
procedure :: init_all_interactions => system_init_all_interactions
procedure :: init_parallelization => system_init_parallelization
procedure :: update_interactions => system_update_interactions
procedure :: update_interactions_start => system_update_interactions_start
procedure :: update_interactions_finish => system_update_interactions_finish
procedure :: propagation_start => system_propagation_start
procedure :: propagation_finish => system_propagation_finish
procedure :: has_reached_final_propagation_time => system_has_reached_final_propagation_time
procedure :: restart_write => system_restart_write
procedure :: restart_read => system_restart_read
procedure :: output_start => system_output_start
procedure :: output_write => system_output_write
procedure :: output_finish => system_output_finish
procedure :: process_is_slave => system_process_is_slave
procedure :: exec_end_of_timestep_tasks => system_exec_end_of_timestep_tasks
procedure :: start_barrier => system_start_barrier
procedure :: end_barrier => system_end_barrier
procedure :: arrived_at_barrier => system_arrived_at_barrier
procedure :: arrived_at_any_barrier => system_arrived_at_any_barrier
procedure(system_init_interaction),           deferred :: init_interaction
procedure(system_initial_conditions),         deferred :: initial_conditions
procedure(system_do_td_op),                  deferred :: do_td_operation
procedure(system_iteration_info),            deferred :: iteration_info
procedure(system_is_tolerance_reached),       deferred :: is_tolerance_reached
procedure(system_update_quantity),           deferred :: update_quantity
```

System classes

Child classes add more features to the parent class.

- Deferred functions can be implemented
- Functions of parent can be overridden

Performing a algorithmic step: `dt_operation()`

- Perform general tasks
- Call `do_td_op()` of child class.

Classicle particles

`classical_particles_t`

- Any number of classical particles
- Described by array of 3-d vector for coordinates

`classical_particle_t`

- Specialized to one particle
- Used for testing

Classicle particles

```
type, extends(system_t), abstract :: classical_particles_t
  private
    integer, public :: np                      !< Number of particles in the system
    FLOAT, allocatable, public :: mass(:)       !< Mass of the particles
    FLOAT, allocatable, public :: pos(:, :)     !< Position of the particles
    FLOAT, allocatable, public :: vel(:, :)     !< Velocity of the particles
    FLOAT, allocatable, public :: tot_force(:, :) !< Total force acting on each particle
    logical, allocatable, public :: fixed(:)      !< True if a giving particle is to be kept fixed during a
                                                !< propagation. The default is to let the particles move.


  type(propagator_data_t),public :: prop_data
contains
  procedure :: do_td_operation => classical_particles_do_td
  procedure :: is_tolerance_reached => classical_particles_is_tolerance_reached
  procedure :: copy_quantities_to_interaction => classical_particles_copy_quantities_to_interaction
  procedure :: update_interactions_start => classical_particles_update_interactions_start
  procedure :: update_interactions_finish => classical_particles_update_interactions_finish
  procedure :: restart_write_data => classical_particles_restart_write_data
  procedure :: restart_read_data => classical_particles_restart_read_data
end type classical_particles_t
```

Classical particles

```
type, extends(classical_particles_t) :: classical_particle_t
  type(c_ptr) :: output_handle
contains
  procedure :: init_interaction => classical_particle_init_interaction
  procedure :: initial_conditions => classical_particle_initial_conditions
  procedure :: iteration_info => classical_particle_iteration_info
  procedure :: output_start => classical_particle_output_start
  procedure :: output_write => classical_particle_output_write
  procedure :: output_finish => classical_particle_output_finish
  procedure :: update_quantity => classical_particle_update_quantity
  procedure :: update_exposed_quantity => classical_particle_update_exposed_quantity
  procedure :: init_interaction_as_partner => classical_particle_init_interaction_as_partner
  procedure :: copy_quantities_to_interaction => classical_particle_copy_quantities_to_interaction
  final :: classical_particle_finalize
end type classical_particle_t
```

Interaction classes

Currently implemented interaction classes:

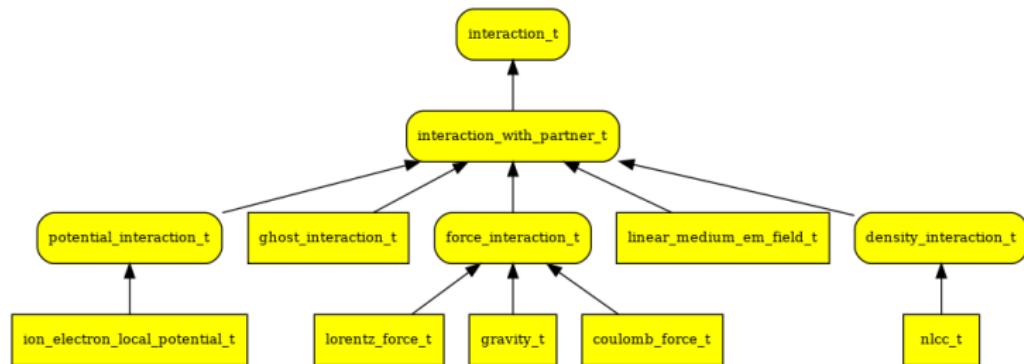

Interaction classes

The abstract class interaction_t:

```
type, abstract :: interaction_t
  private
    !> The interaction requires access to some quantities from a system to be evaluated.
  logical,           public :: intra_interaction !< Is this an interaction of a system with itself?
  integer,           public :: n_system_quantities !< Number of quantities needed from the system
  integer, allocatable, public :: system_quantities(:) !< Identifiers of the quantities needed from the system
  type(clock_t), public :: clock !< Clock storing the time at which the interaction was last updated.
  character(len=:), public, allocatable :: label
contains
  procedure(interaction_update),   deferred :: update
  procedure(interaction_calculate), deferred :: calculate
end type interaction_t
```

Interaction classes

The abstract class `interaction_with_partner_t`:

```
!> Some interactions involve two systems. In this case the interaction is a
!! unidirectional relationship between those two systems. One of the systems
!! owns the interaction and feels its effects. The other system is referred to
!! as the interaction partner.
```

```
type, extends(interaction_t), abstract :: interaction_with_partner_t
  private
  class(interaction_partner_t), public, pointer :: partner

  integer,           public :: n_partner_quantities !< Number of quantities needed from the partner
  integer, allocatable, public :: partner_quantities(:) !< Identifiers of the quantities needed
                                                !< from the partner

contains
  procedure :: update => interaction_with_partner_update
end type interaction_with_partner_t
```

Interaction classes

The abstract class force_interaction_t:

```
type, extends(interaction_with_partner_t), abstract :: force_interaction_t
    integer :: dim = 0          !< spatial dimensions
    integer :: system_np = 0 !< number of particles in the system that the forces are acting on
    FLOAT, allocatable, public :: force(:, :)
end type force_interaction_t
```

Interaction classes

The class gravity_t:


```
!> Gravity interaction between two systems of particles. This should be used
!! for testing purposes only. Note that this interaction assumes all
!! quantities are in S.I. units instead of atomic units.
type, extends(force_interaction_t) :: gravity_t
  private
    FLOAT, pointer :: system_mass(:) !< pointer to array storing the masses of the particles
    FLOAT, pointer :: system_pos(:, :) !< pointer to array storing the positions of the particles

    integer, public :: partner_np = 0 !< number of particles in the partner system
    FLOAT, allocatable, public :: partner_mass(:) !< array storing a copy of the masses of the
                                                !< partner particles
    FLOAT, allocatable, public :: partner_pos(:, :) !< array storing a copy of the positions of the
                                                !< partner particles

contains
  procedure :: init => gravity_init
  procedure :: calculate => gravity_calculate
  final :: gravity_finalize
end type gravity_t
```

Propagator implementation

Class hierarchy of propagators:

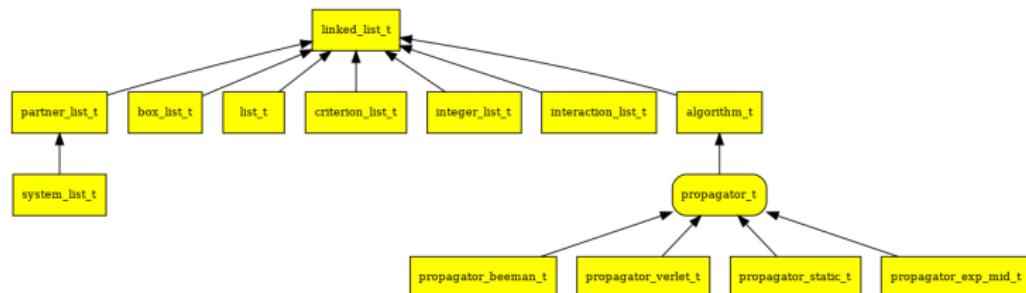

As propagators are derived from linked lists and algorithms, one can directly use their respective methods.

Propagator implementation

Defining a propagator:

```
function propagator_verlet_constructor(dt) result(this)
    FLOAT,                      intent(in) :: dt
    type(propagator_verlet_t), pointer :: this

    PUSH_SUB(propagator_verlet_constructor)

    SAFE_ALLOCATE(this)

    this%start_step = OP_VERLET_START
    this%final_step = OP_VERLET_FINISH

    call this%add_operation(OP_VERLET_UPDATE_POS)
    call this%add_operation(OP_UPDATE_INTERACTIONS)
    call this%add_operation(OP_VERLET_COMPUTE_ACC)
    call this%add_operation(OP_VERLET_COMPUTE_VEL)
    call this%add_operation(OP_FINISHED)

    ! Verlet has only one algorithmic step
    this%algo_steps = 1

    this%dt = dt

    POP_SUB(propagator_verlet_constructor)
end function propagator_verlet_constructor
```

Propagator implementation

Defining a propagator:

```
! Specific verlet propagation operations identifiers
character(len=30), public, parameter ::      &
    VERLET_START      = 'VERLET_START',      &
    VERLET_FINISH     = 'VERLET_FINISH',     &
    VERLET_UPDATE_POS = 'VERLET_UPDATE_POS', &
    VERLET_COMPUTE_ACC = 'VERLET_COMPUTE_ACC', &
    VERLET_COMPUTE_VEL = 'VERLET_COMPUTE_VEL'

! Specific verlet propagation operations
type(algorithmic_operation_t), public, parameter :: &
    OP_VERLET_START      = algorithmic_operation_t(VERLET_START,      'Starting Verlet propagation'),
    OP_VERLET_FINISH     = algorithmic_operation_t(VERLET_FINISH,     'Finishing Verlet propagation'),
    OP_VERLET_UPDATE_POS = algorithmic_operation_t(VERLET_UPDATE_POS, 'Propagation step - Updating positions'),
    OP_VERLET_COMPUTE_ACC = algorithmic_operation_t(VERLET_COMPUTE_ACC, 'Propagation step - Computing acceleration'),
    OP_VERLET_COMPUTE_VEL = algorithmic_operation_t(VERLET_COMPUTE_VEL, 'Propagation step - Computing velocity')
```

These are defined as module variables.

Propagator implementation

Implementing the steps: `system_t%do_td_operation()`

- Actual tasks depend on the specific system.
- the specific function is the same for all implemented algorithms
- ⇒ implement operations for all implemented propagators

Propagator implementation

Implementing the steps: `system_t%do_td_operation()`

```
subroutine classical_particles_do_td(this, operation)
  class(classical_particles_t), intent(inout) :: this
  class(algorithmic_operation_t), intent(in)    :: operation
  ...
  select case (operation%id)
  case (SKIP)
    ! Do nothing
  case (STORE_CURRENT_STATUS)
    this%save_pos(:, 1:this%np) = this%pos(:, 1:this%np)
    this%save_vel(:, 1:this%np) = this%vel(:, 1:this%np)

  case (VERLET_FINISH)
    ...
  case (BEEMAN_FINISH)
    ...
  case (VERLET_UPDATE_POS)
    this%pos(:, 1:this%np) = this%pos(:, 1:this%np) + this%prop%dt * this%vel(:, 1:this%np) &
      + M_HALF * this%prop%dt**2 * this%acc(:, 1:this%np)
    this%quantities(POSITION)%clock = this%quantities(POSITION)%clock + CLOCK_TICK
  ...
  
```